


SOLID Bifacial

Glass / Glass

60 Cell

Frameless

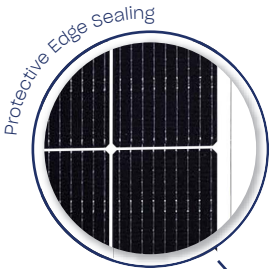


Self-cleaning
effect




Salt mist
resistance



Fire class A



Dust & Sand
resistance



Ammonia
resistance



Extreme load
resistance



Positive sorting up to +5W

Front
side

⚡ 350W

<https://solarenergy.bio>

Avda. Mercado s/n L-10
29601 Marbella

+3460756811
dcalvente@solarenergy.bio

30

Product
warranty

87%

Power
guarantee

30

Efficiency
guarantee

| Electrical data (STC*) | |
|--|----------|
| Maximum Power | 350 |
| Cell Technology | Bifacial |
| Open circuit voltage (V _{oc} /V) | 39,66 |
| Short circuit Current (I _{sc} /A) | 11,01 |
| Max Power Voltage (V _{mpp} /V) | 33,79 |
| Max Power Current (I _{mpp} /A) | 10,37 |
| Module Efficiency (η) | 18,85% |
| Max System Voltage (V) | 1500 |
| Max Current (A) | 20 |
| Power Tolerance | 0/+5W |


*Under Standard Test Conditions (STC) of irradiance of 1000W/sq. m., spectrum AM 1.5 and cell temperature of 25 °C Flash testing measurement accuracy of +/- 5% All transparency values are approximate +/- 3%

| Additional power gain | 5% | 10% | 20% | 25% |
|-------------------------|-----|-----|-----|-----|
| Total Module Power (Wp) | 367 | 385 | 420 | 437 |


| Temperature ratings | |
|--------------------------------------|-------------|
| Current temperature coefficient (α) | +0,04% /° C |
| Voltage temperature coefficient (β) | -0,35% /° C |
| Power temperature coefficient (δ) | -0,47% /° C |
| Nominal Operating Module Temperature | 46° C |

| Mechanical data | |
|---|---------------------------|
| Dimensions (LxWxH) (mm) | 1770x1049x7,1mm |
| Dimensions with edge sealing (LxWxH) (mm) | 1778±5x1057±5x7,1 |
| Weight (kg) | 30 |
| Front / Back glass (mm) | 3 mm |
| Cell Type | Bifacial |
| Cell Size (mm) | 166x166 |
| Busbars | 9 |
| Transparency % | 10 |
| Cell configuration | 6x10 |
| Frame | Frameless |
| Operating Temperature (°C) | -40 ÷ +85 |
| Max Load (wind/snow) (Pa) | 1600/5330** |
| Junction Box / IP Class | Split junction box / IP68 |
| Cable Cross Section Size (mm2) | 4 |
| Cable length | 1,2 m |
| Bypass Diodes | 3 |
| Connector | MC4 compatible |

Dimensions & Mounting

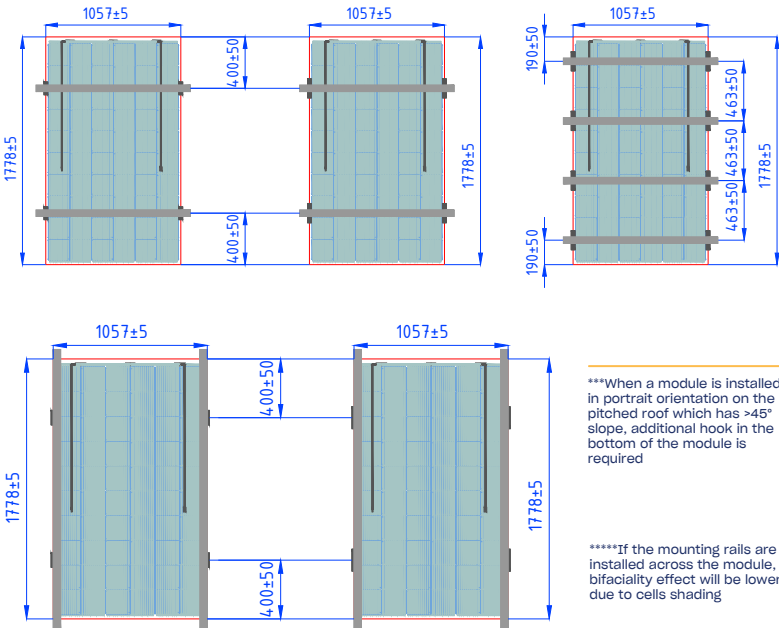

**Safety factor 1,5

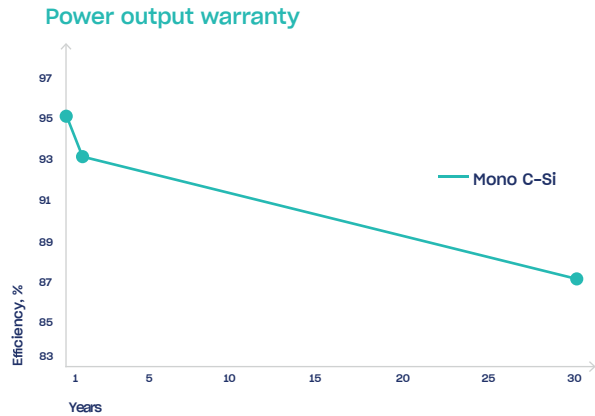

Attention

- Always check if your system is compatible with local environmental conditions (wind/ snow load, temperatures) on your site to ensure safety and long-term energy production.
- Do not connect differently orientated PV panels in the same string / MPPT of the inverter (unless optimizers are used).
- Do not connect strings with an unequal amount of PV panels in one MPPT (unless optimizers are used).
- Use PV panels of same electrical parameters in one string/MPPT (unless optimizers are used).
- Always ensure that your inverter is equipped with DC disconnector. If not it is recommended to install it externally.
- Never let different metals come in contact with each other. Use bi-metallic plates or plastic separators to eliminate galvanic corrosion.
- It is highly recommended to install SPD's in both AC and DC circuits because overvoltages void the warranty for inverters and also panels if they are harmed.
- It is highly recommended to ground PV panels mounting system and to install lightning protection in site.

Tips for Better Power Output

- Better module ventilation and shorter connection cables increase electrical energy production.
- Always observe object/mutual shading in site. Shading can drastically cut electrical energy generation output.
- Increase PV panel height from the ground so that more light can travel beneath the module and then reflect.
- The Albedo value increases significantly if modules are installed above white, lightreflecting surfaces.

